



Manufacturer & Exporter of:

Tube Cleaning Equipments such as Flexible Shafts, Brushes, Cutters, Tube Expanders, Construction Equipments Concrete Vibrators, Flexible shaft Grinders & Accessories.



TUBE WALL REDUCER FEATURES:

- Wall reduces available for mm tube sizes also. Please enquire.
- Wall reducers are suited for tube sheets up to 5" thick. Longer reaches are available.
- Its is used to 'thin' the walls of heavy gauge tubes as a step in their removal from tube sheet.



Tube O.D. Inch	Model Number	MT Shank #
3/8	WR-375	1
	WR-500	2
5/8	WR-625	2
3/4	WR-750	2
7/8	WR-875	3
1	WR-1000	3
1.1/4	WR-1250	3
	WR-1500	3
1.3/4	SH-1750	3
2	SH-2000	3
2.1/2	SH-2500	4
2.3/4	SH-2750	4
3	SH-3000	4
3.1/4	SH-3250	4
3.1/2	SH-3500	4
4	SH-4000	4

TUBE DRIFT/KNOCK OUT TOOL FEATURES:

- Tube drills are available for mm tube sizes also. Please enquire.
- The drifts are available for mm tube sizes also. Please enquire
- It is used with pneumatic chipping hammer to knock out tubes/ tube stubs form tube sheet.
- Available in 01 & 06 shanks



Tube O.D. Inch	Model Number
3/8	KT-375
1 /2	KT-500
5/8	KT-625
3/4	KT-750
7/8	KT-875
1	KT-1000
1.1/4	KT-1250
1.1/2	KT-1500
1.3/4	KT-1750
2	KT-2000
2.1/2	KT-2500
2.3/4	KT-2750
3	KT-3000
3.1/4	KT-3250
3.1/2	KT-3500
4	KT-4000

COLLAPSING TOOL FEATURES:

- Tube drills are available for mm tube sizes also. Please enquire.
- The drifts are available for mm tube sizes also. Please enquire
- It is used with pneumatic chipping hammer to knock out tubes/ tube stubs form tube sheet.
- Available in 01 & 06 shanks




Tube O.D. Inch	Model Number
3/8	CT-375
1 /2	CT-500
5/8	CT-625
3/4	CT-750
7/8	CT-875
1	CT-1000
1.1/4	CT-1250
1.1/2	CT-1500
1.3/4	CT-1750
2	CT-2000
2.1/2	CT-2500

PUSH TYPE INTERNAL TUBE CUTTER- BATP SERIESFEATURES:

- BHARTIYA "Push Type" internal tube cutter quickly cuts through the walls of ferrous tubes in condensers and Heat exchanger as step in their removal from the tube sheet.
- This sturdy "Push Type" internal tube cutters can be used with a portable Electric or Air Drill Motor.
- "Push Type" cutter is simple to operate. Merely insert it into the tube. Apply power press inward and the tube can be cut in few seconds. Releasing of inward pressure automatically retracts the Cutter Bit. This cutter is equipped with an adjustable collar suitable for reaching into tubes at various depths.
- The replaceable cutting bit can be interchanged in a few seconds. Standard adjustable reach is 4" (101.6mm) and they are available in optional



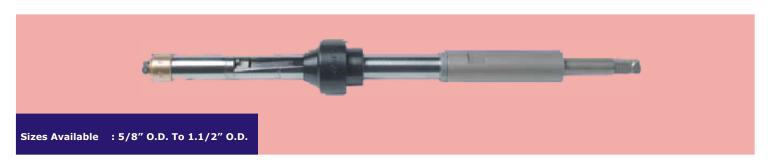

Tube O.D.	Tube Gauge (BWG)	Spare cutting Bit Model No.	Tube Cutter Model No. (Std. Reach)
5/8"	14 - 22	BATP-625-SB	BATP-625
3/4"	14 - 22	BATP-750-SB	BATP-750
7/8"	14 - 22	BATP-875-SB	BATP-875
1"	12 - 22	BATP-1000-SB	BATP-1000
1.1/4"	12 - 22	BATP-1250-SB	BATP-1250
1.1/2"	12 - 22	BATP-1500-SB	BATP-1500

▼ INTERNAL TUBE CUTTER - BPR 68 SERIES FEATURES:

- The internal tube cutter BPR-68 is driven via the square in a clockwise direction using either an electric, pneumatic, or hydraulic driving machine.
- BPR-68 tube cutters are ideal for cutting thick walled boiler tubes of 2" O.D. & higher.
- BPR-68 type tube cutters are available in standard reach of 4" (100mm). Additional reaches in increments of 4" are available up to 16" (400mm)



Tool Model		Spare Bit Model	Tube I.D.Range		Max. Tu		Body Di		Drive Square
Number	Size	Number	Inch	Mm	Inch	Mm	Inch	Mm	Male
0680951	095	1680951	.394472	10 - 12	.591	15	.374	9.5	
0681051	105	1000931	.433512	11 - 13	.709	18	.413	10.5	
0681151	115	1681151	.472551	12 - 14	.748	19	.453	11.5	
0681251	125		.519591	13 - 15	.787	20	.492	12.5	
0681351	135	1681251	.551669	14 - 17	.906	23	.531	13.5	
0681551	155		.630748	16 - 19	.984	25	.610	15.5	1/2"
0681751	175	1681751	.709827	18 - 21	1.063	27	.689	17.5	72
0681951	195	1681951	.787984	20 - 25	1.339	34	.768	19.5	
0682451	245	1682451	.984181	25 - 30	1.496	38	.965	24.5	
0682901	290		1.181376	30 - 35	1.963	43	1.142	29	
0683301	330	1682901	1.378 - 1.575	35 - 40	1.890	48	1.299	33	
0683801	380		1.575 - 1.969	40 - 50	2.126	58	1.496	38	
0684801	480		1.969 - 2.362	50 - 60	2.677	68	1.890	48	
0685301	530	1684801	2.165 - 2.559	55 - 65	2.874	73	2.087	53	
0686301	630		2.559 - 2.953	65 - 75	3.268	83	2.480	63	3/4"
0687301	730		2.953 - 3.346	75 - 85	3.661	93	2.874	73	3/4
0688301	830	1687301	3.346 - 3.740	85 - 95	4.055	103	3.268	83	
0689301	930		3.740 - 4.134	95 - 105	4.449	113	3.661	93	



TUBE PLUGSFEATURES:


- Tube plugs are designed for sealing off leaking or damaged tubes in heat exchanger, condensers, boilers etc. It ensures a uniform joint without damaging the tube sheet.
- Note: Tube plugs are available in a variety of materials like carbon steel, brasss, stainless steel, fibre etc. Specify material needed when ordering.



Tube Inch	O.D. Mm	One Piece Tube Plug Model No.	Two Piece Tube Plug Model No.
3/8	9.53	BPLG-375-1	-
1 /2	12.70	BPLG-500-1	BPLG-500-2
5/8	15.87	BPLG-625-1	BPLG-625-2
3/4	19.05	BPLG-750-1	BPLG-750-2
7/8	22.22	BPLG-875-1	BPLG-875-2
1	25.40	BPLG-1000-1	BPLG-1000-2
1.1/4	31.75	BPLG-1250-1	BPLG-1250-2
1.1/2	38.10	BPLG-1500-1	BPLG-1500-2

ONE REVOLUTION INTERNAL TUBE CUTTER- BOTC SERIES FEATURES:


- This one revolution Internal Tube Cutter is designed for hand operation using a ratchet handle.
- BHARTIYA "One Revolution" Internal Tube Cutter pierces and cuts off non-ferrous tubes in one revolution.
- The cutter tool Bit operates on an eccentric principle. The tube cutter is entered in the tube with the Tool Bit closed position, ratchet is applied and turned in clockwise direction. The Tool bit contacts the tube during the one revolution & pierces the tube wall & as turning is continued the Tool Bit shares through the Tube along its circumference. This cutter is fitted with an adjustable collar enabling it to reach into tubes at various distances and they are available in optional increments of 2" (50.8mm). Standard adjustable reach is 6 "(152.4mm). "A" reach = 8" (203.2), B reach = 10" (254.0mm), C reach= 12" (304.8mm) etc.

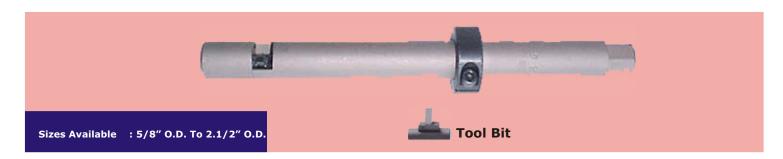



▼ MANUAL TUBE PULLER FEATURES:

- Simple Design: Only two major parts reduce inventory
- No power needed: Manual insertion and removal of tube with a hand wrench. Ideal for field service application.
- Ease of use: Hex at back of spear allows tightening without disassembly of thrust mechanism.
- Range of Sizes: A wide range of sizes allows use on popular tube size. Clarity of marking: Both spear & thrust collar are clarify marked for last relating tool to job
- Larger sizes can be mad e available on request.

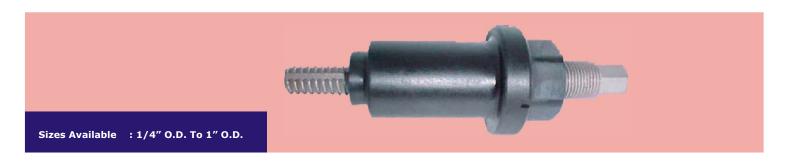

Tube Size								
0.	D.	BWG	Wall Thi	ckness	I.D).	Tube Pullar Spare Spea Model Number Model Numb	
Inch	Mm	DWG	Inch	Mm	Inch	Mm		
1/4	6.35	18	.049	1.24	.152	3.86	BMTP-25-18	BMPS-25-18
3/8	9.52	16	.065	1.65	.245	6.22	BMTP-38-16	BMPS-38-16
3/8	9.52	18	.049	1.24	.277	7.04	BMTP-38-18	BMPS-38-18
3/8	9.52	20	.035	0.88	.305	7.75	BMTP-38-20	BMPS-38-20
1 / 2	12.70	14	.083	2.11	.334	8.48	BMTP-50-14	BMPS-50-14
1 / 2	12.70	16	.065	1.65	.370	9.40	BMTP-50-16	BMPS-50-16
1 / 2	12.70	18	.049	1.24	.402	10.21	BMTP-50-18	BMPS-50-18
1 / 2	12.70	20	.035	0.88	.430	10.92	BMTP-50-20	BMPS-50-20
5/8	15.88	14	.083	2.10	.459	11.66	BMTP-63-14	BMPS-63-14
5/8	15.88	16	.065	1.65	.495	12.57	BMTP-63-16	BMPS-63-16
5/8	15.88	18	.049	1.24	.527	13.39	BMTP-63-18	BMPS-63-18
5/8	15.88	20	.035	0.88	.555	14.10	BMTP-63-20	BMPS-63-20
3/4	19.05	14	.083	2.10	.585	14.86	BMTP-75-14	BMPS-75-14
3/4	19.05	16	.065	1.65	.620	15.75	BMTP-75-16	BMPS-75-16
3/4	19.05	18	.049	1.24	.652	16.56	BMTP-75-18	BMPS-75-18
3/4	22.22	20	.035	0.88	.680	17.27	BMTP-75-20	BMPS-75-20
7/8	22.22	14	.083	2.10	.709	18.01	BMTP-87-14	BMPS-87-14
7/8	22.22	16	.065	1.65	.745	18.92	BMTP-87-16	BMPS-87-16
7/8	22.22	18	.049	1.24	.777	19.74	BMTP-87-18	BMPS-87-18
7/8	25.40	20	.035	0.88	.805	20.45	BMTP-87-20	BMPS-87-20
1	25.40	14	.083	2.10	.834	21.18	BMTP-100-14	BMPS-100-14
1	25.40	16	.065	1.65	.870	22.10	BMTP-100-16	BMPS-100-16
1	25.40	18	.049	1.24	.902	22.91	BMTP-100-18	BMPS-100-18
1	25.40	20	.035	0.88	.930	23.62	BMTP-100-20	BMPS-100-20



*** 'PINE JENNY' STYLE TUBE PULLING ACCESSORIES:**

PINE JENNY TUBE SPEARS



TUBE SPEAR



Tube OD Inch	Model Number	BWG
3/8"	S-0916	16-17
3/8"	S-0918	18-19
3/8"	S-0920	20-21
3/8"	S-0922	22-24
5/8"	S-1212	12-13
5/8"	S-1214	14-15
5/8"	S-1216	16-17
5/8"	S-1218	18-19
5/8"	S-1220	20-21
3/4"	S-1911	11-13
3/4"	S-1914	14-15
3/4"	S-1916	16-17
3/4"	S-1918	18-19
3/4"	S-1920	20-21
7/8"	S-2212	12-13
7/8"	S-2214	14-15
7/8"	S-2216	16-17
7/8"	S-2218	18-19
7/8"	S-2220	20-21

Tube OD Inch	Model Number	BWG
1	S-2509	9
1	S-2510	10-11
1	S-2512	12-13
1	S-2514	14-15
1	S-2516	16-17
1	S-2518	18-19
1	S-2520	20-21
1-1/4	S-3112	12-13
1-1/4	S-3114	14-15
1-1/4	S-3116	16-17
1-1/4	S-3118	18-19
1-1/4	S-3120	20-21
1-1/2	S-3814	14-16
1-1/2	S-3817	17-20
1-3/4	S-4414	14-18
2	S-5014	14-18
2-1/2	S-5714	14-18
3	S-7610	10-14

B3053-3 SINGLE PULL ADAPTOR



B3055-6 DOUBLE PULL ADAPTOR





B3055-5 MALE X MALE EXTENSION



B3055-4 HORSE SHOE LOCK



B3055-5 MALE X FEMALE EXTENSION



EXTENSION CHAIRS



Model	Tube O.D.
80-3055-7	1.1/4"-1.1/2"
80-36307	1.3/4"
80-36308	2"-2.1/4"
80-36309	2.1/2"
80-36310	2.3/4"-3"

- Note: All the above items are compatible for use with Tube Pulling Systems of Airetool, Wilson, Elliot & other manufacturers of "Pipe Jenny" style systems.
- Extensions chair is sized to allow tube being pulled to enter I.D. Of chair, spears, Adaptors, Male x Male extension, Horse Shoe Lock & Extension Chair are needed for sizes 1.1/4" O.D. And larger. Male x Female Extensions are used for longer reach. Consult us for sizes not listed here.

Note: For details of model nos of tools, please contact us.

BHARTIYA INDUSTRIES

WORKS: PLOT NO. 268, DIGVIJAY INDUSTRIAL ESTATE NO.2. UPAVAN, POKHARAN ROAD NO.1, THANE (W) M.S. INDIA - 400603. OFFICE: G-201, USHA COMPLEX, KHANDELWAL MARG, BHANDUP (W.), MUMBAI -400078, INDIA PH.: +91-22-2585 4509, 6505 6400, 2566 6421 FAX: +91-22-2585 4509.

Website: www.bharatflex.com, www.bharatiyaindustries.com, E-mail : bharatflex@yahoo.com

Authorised Dealer